




TECHNICAL SPECIFICATIONS

Max Rated Speed	9,700 RPM
Angular Momentum at Max Rated RPM	6,000 N-M-S
Anti-Rolling Torque at Max Rated RPM	15,690 N-M
Spool-up Time to Max Rated RPM	42 minutes (9,700 RPM)
Spool-up Time to Stabilization	28 minutes (7,700 RPM)
Power Consumption	
Spool-Up Power	2300 Watts
Operating Power	1050 - 2300 Watts (Sea State Dependent)
AC Power Input	110 / 220 VAC, 50/60 Hz
Control Power	125 Watts
Control Power Input	12 VDC @ 10 Amps
Seawater Pump Power Input Over Current Protection based on installed pump rating	12 VDC @ 15 Amps Max
Weight	870 lbs (395 kg)
Envelope Dimensions	29.8 L x 29.7 W x 24.7 H (inches) 0.756 L x 0.755 W x 0.626 H (meters)
Noise Output	70-72 dBC at 1 meter
Seawater Supply to Heat Exchanger	30 LPM (8 GPM) maximum 9.5 LPM (2.5 GPM) minimum
Ambient Air Temperature	0° - 60° C (32° - 140° F)

Marine Service Asia offers the details of this device in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the device.



DRAWINGS

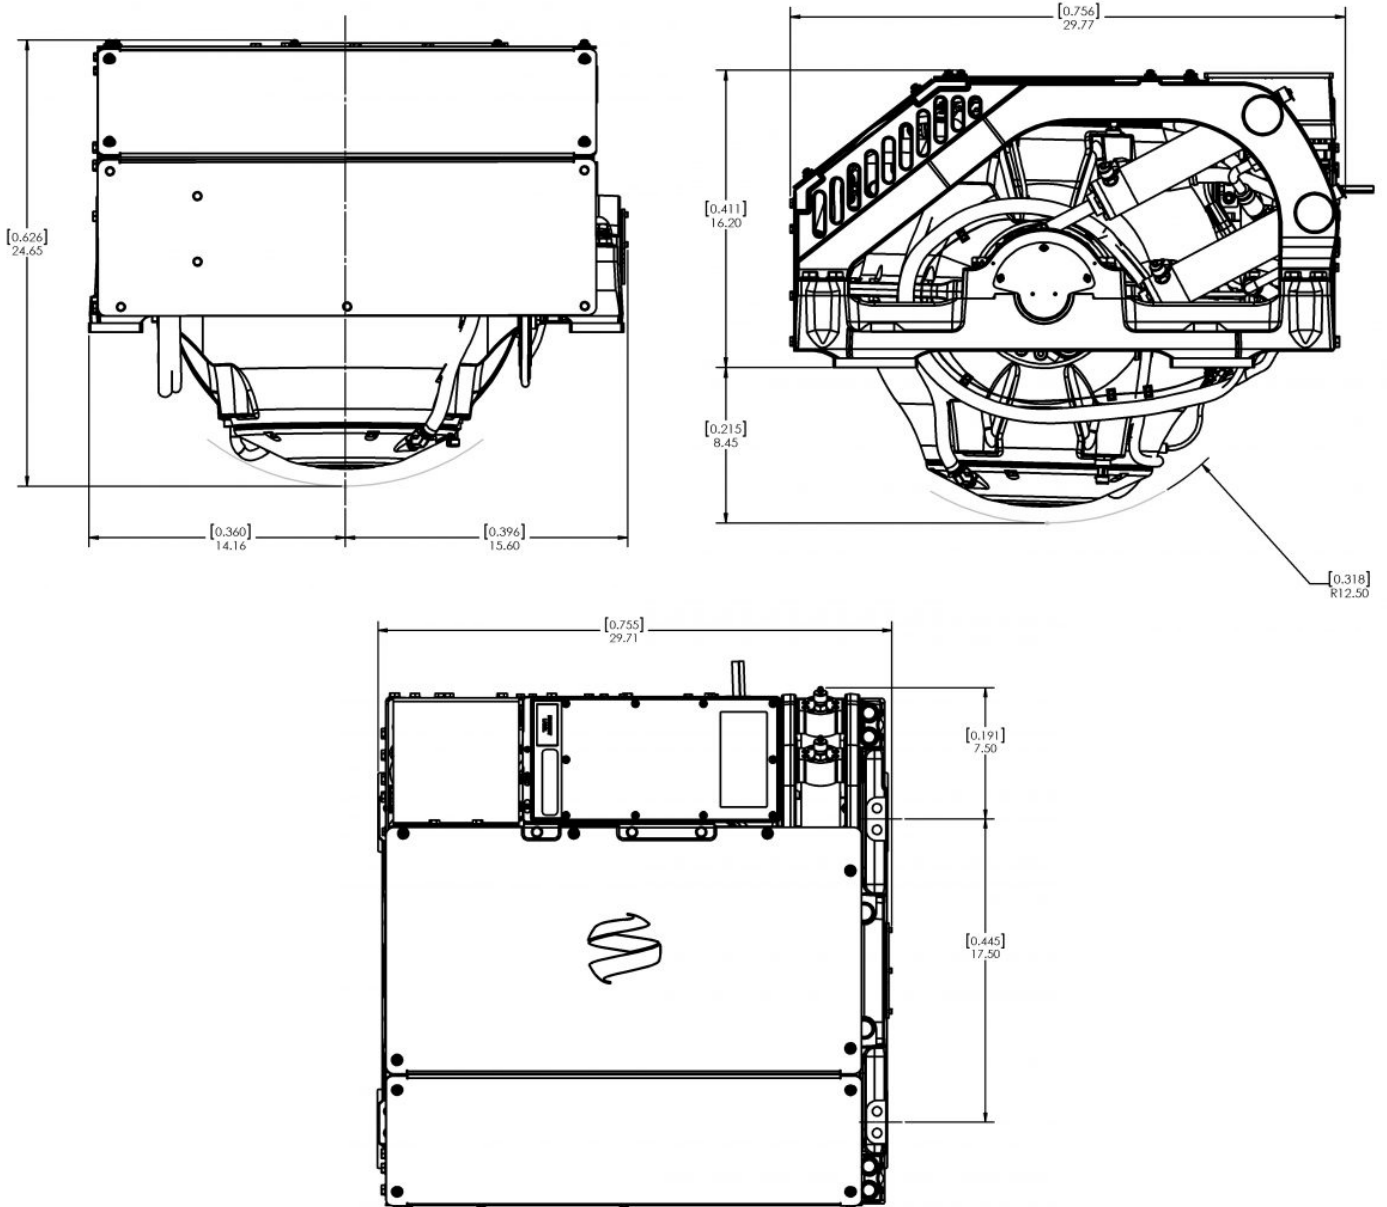

Marine Service Asia offers the details of this device in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the device.

