




# TECHNICAL SPECIFICATIONS

Max Rated Speed	9,000 RPM
Angular Momentum at Max Rated RPM	9,000 N-M-S
Anti-Rolling Torque at Max Rated RPM	18,810 N-M
Spool-up Time to Max Rated RPM	55 minutes (9,000 RPM)
Spool-up Time to Stabilization	38 minutes (7,650 RPM)
Power Consumption	
Spool-Up Power	3000 Watts Max
Operating Power	1000 - 2000 Watts (Sea State Dependent)
AC Power Input	220 VAC, 50/60 Hz
Control Power	240 Watts
Control Power Input	24 VDC @ 10 Amps
Seawater Pump Power Input Over Current Protection based on installed pump rating	24 VDC @ 10 Amps Max
Weight	1,210 lbs (550 kg)
Envelope Dimensions	33.5 L x 35.6 W x 27.9 H (inches) 0.852 L x 0.903 W x 0.708 H (meters)
Noise Output	68-70 dBC at 1 meter
Seawater Supply to Heat Exchanger	30 LPM (8 GPM) maximum 15 LPM (4 GPM) minimum
Ambient Air Temperature	0°-60° C (32° - 140° F)

Marine Service Asia offers the details of this device in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the device.



# DRAWINGS

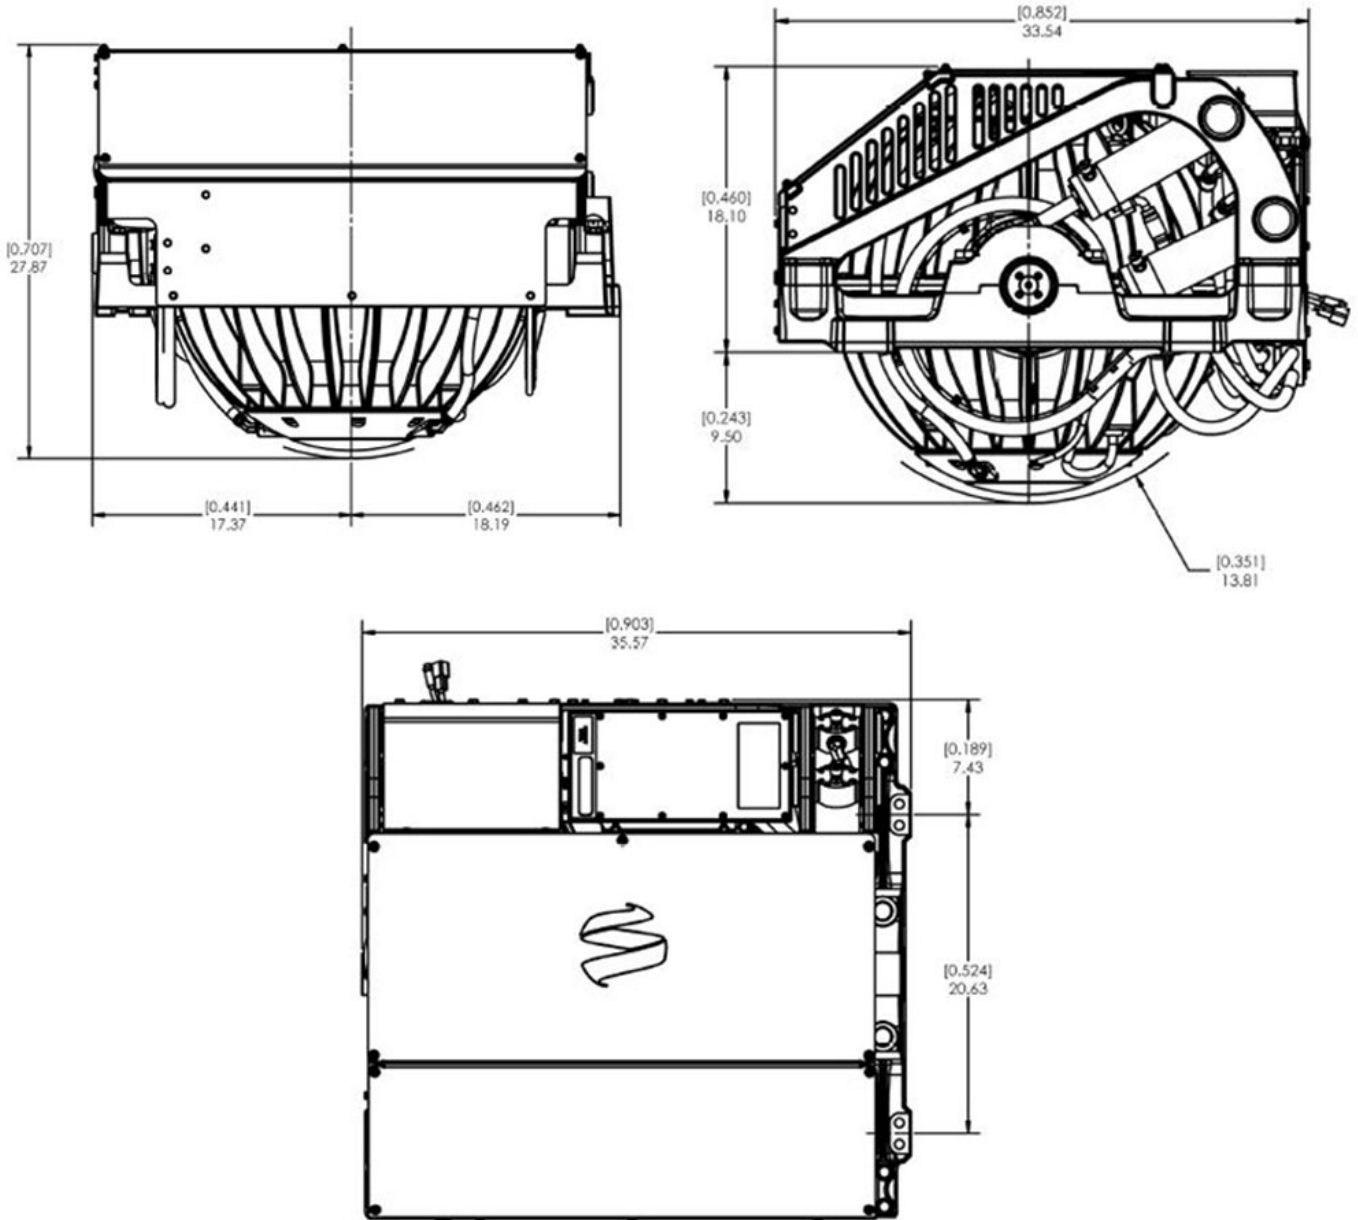

Marine Service Asia offers the details of this device in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the device.

